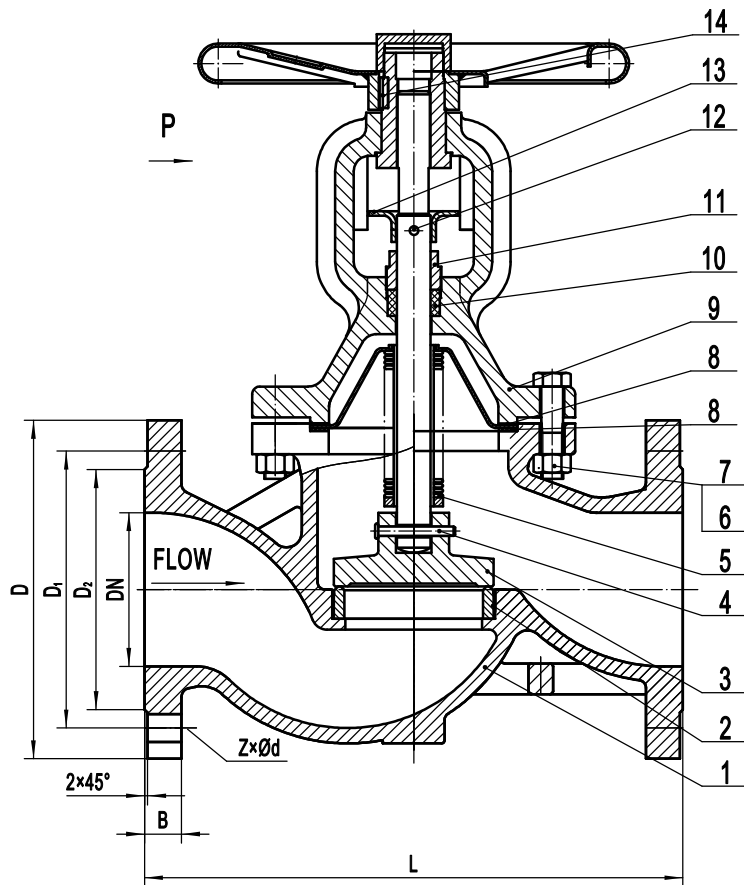


TECHNICAL REQUIREMENT

1. STANDRED ACCORDING TO DIN 3356;
2. FACE TO FACE ACCORDING TO F1 SEIRE OF DIN3202 (FIRST SEIRE OF GB/T12221) ;
- 3.FLANGE PERFORM THE REGULATION OF BS EN1092-2:1997;
- 4.PRESSURE TEST SHOULD ACCORDING WITH ISO 5208;

SPECIFICATION

DN	DN15-300		
PRESSURE	1.6 MPa		
TEMP.	≤200℃		
TEST PRESSURE MPa	SEAL(AIR)	0.6	
	SHELL(WATER)	2.4	
	BACK SEAT	\	
MEDIUM	WATER、STEAM、OIL		

DN	L	D	D ₁	D ₂	B-f	Z×Ød
15	130±2	Ø95	Ø65	Ø46	14-2	4×Ø14
20	150±2	Ø105	Ø75	Ø56	16-2	4×Ø14
25	160±2	Ø115	Ø85	Ø65	16-2	4×Ø14
32	180±2	Ø140	Ø100	Ø76	18-2	4×Ø19
40	200±2	Ø150	Ø110	Ø84	18-2	4×Ø19
50	230±2	Ø165	Ø125	Ø99	20-2	4×Ø19
65	290±2	Ø185	Ø145	Ø118	20-2	4×Ø19
80	310±2	Ø200	Ø160	Ø132	22-2	8×Ø19
100	350±2	Ø220	Ø180	Ø156	24-2	8×Ø19
125	400±2	Ø250	Ø210	Ø184	26-2	8×Ø19
150	480±2	Ø285	Ø240	Ø211	26-2	8×Ø23
200	600±2	Ø340	Ø295	Ø266	30-2	12×Ø23
250	730±3	Ø405	Ø355	Ø319	32-3	12×Ø28
300	850±3	Ø460	Ø410	Ø375	32-3	12×Ø28

8	GASKET	08#STEEL+GRAPHITE			
7	1 STYPE HEX NUT	35#STEEL			
6	HEXAGON BOLT	35#STEEL			
5	BELLOW PART ASSEMBLY				
4	HINGE PIN A TYPE	2Cr13			
3	DISC	DN15-DN100(2Cr13)	DN125-DN300(A105)		
2	BODY SEAL RING	SS304			
1	BODY	GG25			

NO.	CODE	NAME	QTY	MATERIAL	UNIT	TOTAL WEIGHT	NOTE
18		GREASE NIPPLES					
17		STEM NUT		ZCuZn38Mn2Pb2			
16		HANDWHEEL		Q235 STEEL			
15		NUT		Q235 STEEL			
14		A STYPE FLAT KEY		45#STEEL			
13		STOP PLATE		Q235 STEEL			
12		ELASTIC CYLINDRICAL PIN		45#STEEL			
11		PLUG SCREW		Q235 STEEL			
10		PAKING		GRAPHITE			
9		BONNET		GG25			

YUANDA VALVE GROUP CO.,LTD.

BELLOW GLOBE VALVE

WJ41H-16-15-300.00