
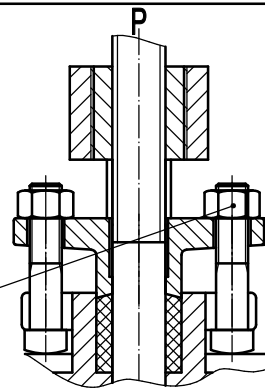


00'003-91-91-H17J (NID)

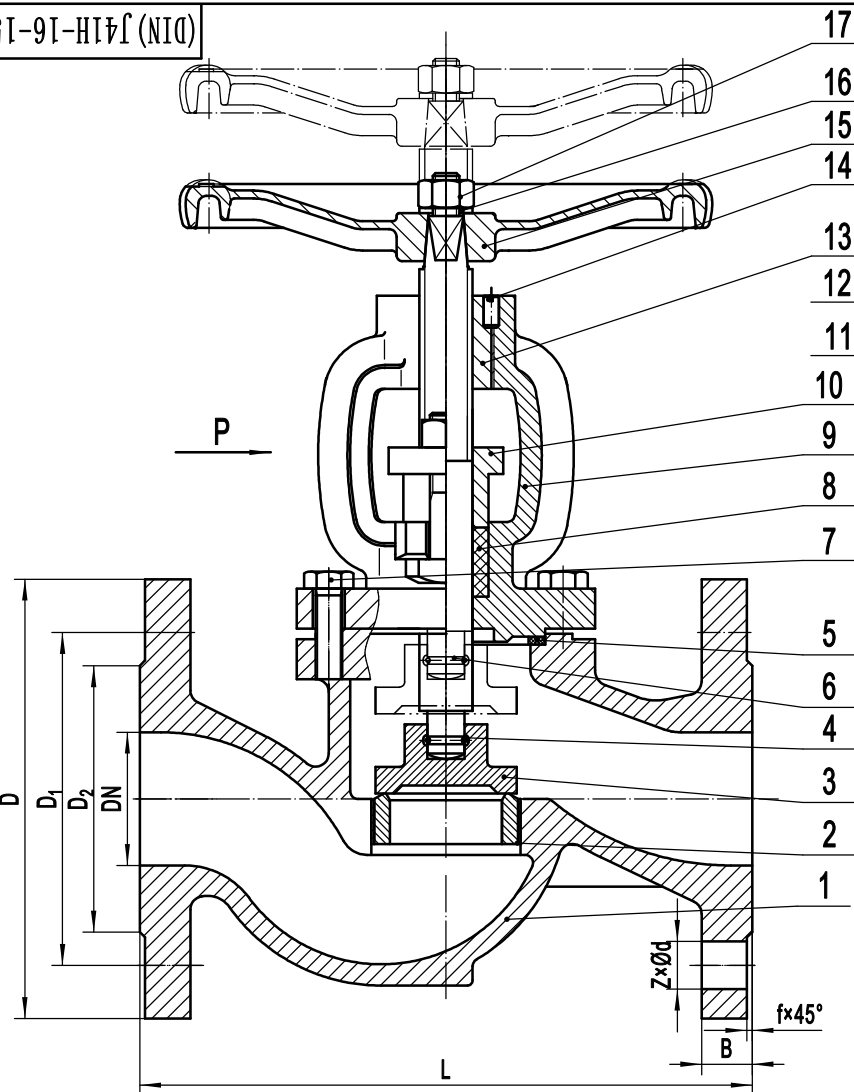

TECHNICAL REQUIREMENT

- 1.DESIGN ACCORDING TO BS EN 13789;
- 2.FACE TO FACE ACCORDING TO BS EN558-1;
- 3.FLANGE ACCORDING TO BS EN1092-2:1997;
- 4.PRESSURE TEST ACCORDING TO BS EN 12266

SPECIFICATION

SIZE	DN15-300	
PN	1.6MPa	
TEMP. °C	≤200 °C	
TEST PRESSURE MPa	SEAL(WATER)	1.8
	SHELL(WATER)	2.4
	BACK SEAT	\
MEDIUM	WATER、STEAM、OIL	

DN	L	D	D ₁	D ₂	B-f	Z-Ød
15	130±2	95	65	46	14-2	4-Ø14
20	150±2	105	75	56	16-2	4-Ø14
25	160±2	115	85	65	16-2	4-Ø14
32	180±2	140	100	76	18-2	4-Ø19
40	200±2	150	110	84	18-2	4-Ø19
50	230±2	165	125	99	20-2	4-Ø19
65	290±2	185	145	118	20-2	4-Ø19
80	310±2	200	160	132	22-2	8-Ø19
100	350±2	220	180	156	24-2	8-Ø19
125	400±2	250	210	184	26-2	8-Ø19
150	480±2	285	240	211	26-2	8-Ø23
200	600±2	340	295	266	30-2	12-Ø23
250	730±3	405	355	319	32-3	12-Ø28
300	850±3	460	410	375	32-3	12-Ø28

9		BONNET		GGG40
8		PACKING		GRAPHITE
7		BOLT		35#STEEL
6		STEM		2Cr13
5		GASKET		08#STEEL+GRAPHITE
4		STAINLESS STEEL WIRE		SS304
3		DISC		DN15-65(2Cr13), DN80-300(A105)
2		BODY SEAL RING		2Cr13
1		BODY		GG25
NO.	CODE	NAME	QTY	MATERIAL

17		NUT	25#STEEL			
16		FLAT WASHER	Q235 STEEL			
15		HANDWHEEL	DUCTILE IRON			
14		SLOTTED FLAT END SET SCREW	35#STEEL			
13		STEM NUT	ZQA1 9-4			
12		NUT	25#STEEL			
11		T SHAPE OF BOLT	35#STEEL			
10		GLAND	GG25			

YUANDA VALVE GROUP CO.,LTD

GLOBE VALVE

J41H-16-15-300.00